

DS-A81 Series Hybrid SAN

Introduction

The DS-A81 series is an economical controller-structure Hybrid SAN (Storage Area Network) product. Hikvision Hybrid SAN product creates a network with access to data storage servers, and it integrates Hikvision's unique video direct streaming technology as well as supports IPSAN. This flexible, cost-effective solution features ONVIF-support to third-party cameras such as BOSCH, AXIS, SONY, Samsung etc, support for RTSP, and SIP protocols, and extended data retention. With no recording server needed, Hikvision's Hybrid SAN systems truly make applications simple, flexible, and budget-friendly.



Features

Economical and Stable Hardware Platform

- Modular and no-cable design and SBB 2.0 structure.
- 64-bit multi-core processor.
- 4 GB high-speed cache.
- Four 1000M network interfaces.
- 12G SAS high-speed transmission channel.
- Redundant design for key modules.

HDD Detection and Repair/RAID Optimization

- Detection before operation.
- Detection in operation.
- Fault reparation.
- RAID 0, 1, 3, 5, 6, 10, 50, and VRAID.
- Global and local hot spare.
- Supports building RAID with surveillance-class HDD.
- Quick RAID building.
- Capability of cascading up to two storage enclosures behind a single SAS port.

Advanced Data Protection

- Synchronous backup of key information in system disk and HDD.
- RAID-based tamper-proof data technology.
- Auto data synchronization between devices.

Energy Efficient

- CPU load balance
- Auto fan tuning
- HDD sleeping

User-Friendly UI

- Quick configuration.
- Various alarm management.
- SADP protocol supported.
- SNMP supported.

Surveillance-Specialized Stream Media Direct Storage (Direct Streaming Mode)


- Space pre-allocation strategy.
- Direct storage for video and picture streams.
- Supports direct IP camera/DVR/NVR streaming and recording.
- Support H264,H264+,H265,H265+.
- Support N+1.
- Supports camera access through RTSP, ONVIF, and PSIA protocol.
- Supports alarm/scheduled/manual recording.
- Automatic network replenishment (ANR), timely uploading, and video loss alarm.
- Lock key videos.
- VRAID data protection.
- Supports both Direct Streaming Mode and IPSAN Mode.
- Search, play, and download videos by video type or video time.



Specification

Model		DS-A81016S
Performance	Direct Streaming Mode: video (2 Mbps) + picture	320-ch recording + playback
	IPSAN	180-ch recording + playback
Controller	Processor	One controller (64-bit multi-core processor)
	Cache	4 GB (extendable to 32 GB)
HDD	HDD slot	16
	Interface/capacity	SATA/1TB, 2TB, 3TB, 4TB, 6TB
	Hot-swapping	Supported
	RAID	RAID0, 1, 3, 5, 6, 10, 50, VRAID, JBOD, Hot-spare
Storage Management	Disk management	Disk inspection, alarm and repair
	Logical volume management	iSCSI volume, video volume management
Recording Management	Recording mode	Timing recording, manual recording, dual-stream recording, alarm recording
	Video protection	Lock key video, N+1 service protection, ANR, video loss detection and alarm
	Searching mode	Search by time and event
	Downloading mode	Quick download, batch download, download by segment, download by merging
Device Maintenance	Management mode	Web-based GUI, serial port CLI, centralized management of multiple devices
	Alarm mode	Sound, light, email, message, web page
	Log downloading	Download no web page
Network	Protocol	iSCSI, RTSP, ONVIF, PSIA
Interfaces	Data network interface	3, 1000M Ethernet interface
	Management network interface	1, 1000M Ethernet interface
	MiniSAS interface	Supported
	COM	1
	USB 3.0	2
	Alarm interface	1
	HDMI	2
General	Power supply	Redundant
	Consumption (with HDDs)	<ul style="list-style-type: none"> ● Working: ≤308 W (967 BTU with 16 HDDs) Rated: ≤ 550 W
	Environment temperature	<ul style="list-style-type: none"> ● Working: +5 °C to +40 °C (41 °F to 104 °F) Storing: -20 °C to +70 °C (-4 °F to +158 °F)
	Environment humidity	<ul style="list-style-type: none"> ● Working: 20% to 80%RH (non-condensing/frozen) ● Storing: 5% to 90%RH (non-condensing/frozen)
	Chassis	3U (19-inch height)
	Dimensions (W × H × D)	440 x 132 x 495 mm (17.3 x 5.2 x 19.5 in)
	Weight (without HDDs)	≤ 20 Kg (44.1 lb)

Typical Application

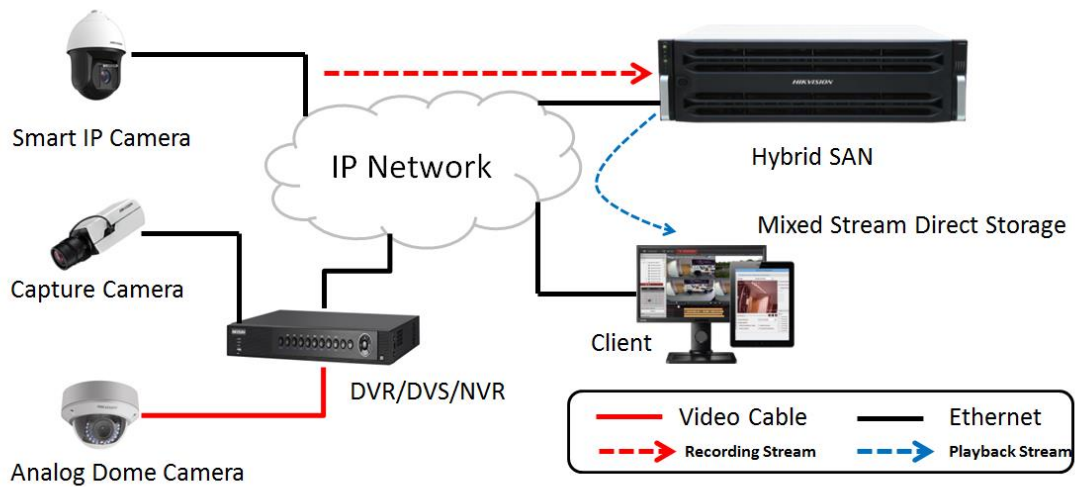

Available Models

DS-A81016S

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (0) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761