

P Series IP Camera

OND-P3621-MZ



Series	P Series 2MP, H.265, Motorize Zoom Lens, 120dB WDR, Dome Type
--------	--

Camera

Image Sensor	1 / 2.7 "CMOS
Image Size	1920 x 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.05 lux @F1.2,AGC ON; 0 lux with IR
Lens	2.8 ~ 12 mm(AZ) @F1.4, horizontal field of view : 109.8° ~ 38.5°
Lens Mount	Ø14
Day & Night	ICR
Wide Dynamic Range	120dB
Digital NR	3D DNR
Angle Adjustment	Pan : 0°~360°, Tilt : 0°~90°, Rotation : 0°~360°

Image

Video Compression	H.265+ / H.264 / MJPEG
H.265 Compression	Main Profile @Leve4.1 High Tier
Resolution	1080P (1920 x 1080), 720P (1280 x 720),D1, CIF, 480 x 240
Main Stream	60Hz : 1080P (1 ~ 30 fps) / 720P (1 ~ 30 fps) 50Hz : 1080P (1 ~ 25 fps) / 720P (1 ~ 25 fps)
Bit Rate	128 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately

Interfaces

Network	RJ45
Audio	MIC IN x 1
Video Output	CVBS video output (BNC x 1)


Functions

Remote Monitoring	IE browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Network Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS,SMTP,FTP
Interface Protocol	ONVIF, GB-T / 28181 - 2011
Storage	Network remote storage
Smart Alarm	Motion alarm
Smart Analysis	Object removal detection, line crossing detection and intrusion detection, etc.
Corridor Mode	Yes
PoE	Yes
IR Distance	30 ~ 50m
Ingress Protection	IP66,IK10

Others

Power Supply	DC12V / PoE
Power Consumption	< 2W
IR Consumption ON	< 4.5W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity
Dimensions (mm)	Ø109 x 130
Weight (net)	701g
Installation	Pendent mounting

2 MP Network IR Water-proof Motorize Zoom Dome Camera

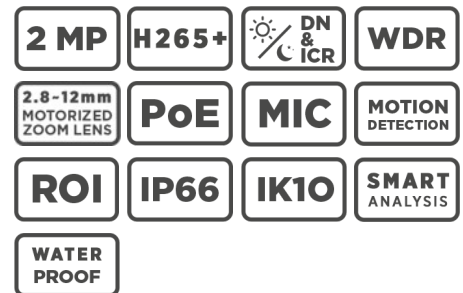

Features

- * 1080P (1920 x 1080) full real time coding
- * Max.resolution : 1920 x 1080
- * ICR auto switch, true day / night
- * 30 ~ 50 m IR night view distance
- * 3D DNR, physical WDR
- * Smart analysis including object removal, line crossing detection and intrusion detection, etc.
- * ROI coding
- * Support CVBS video output and one-way audio
- * PoE power supply
- * Support smart phone, iPad, remote monitoring
- * Support P2P
- * IP66 ingress protection
- * Support three streams

