

SN-IPR54/14ACDN(III)


1080P Network IR Mini Eyeball



Key features

- 1/2.9" Progressive Scan CMOS
- 3.6mm,2.8/6mm optional
- Full HD 1080P
- Multiple Streams
- IR Up to 20m
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- Support ROI,Corridormode,HLC

Dimension

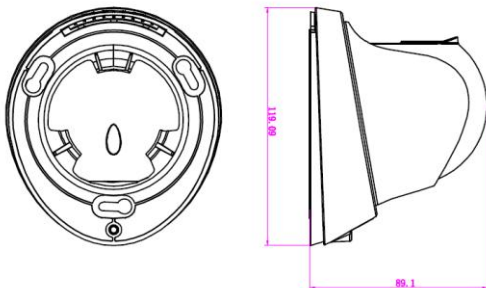

Accessories



SN-CBK633

Specifications

| CAMERA | |
|-------------------------|--|
| Image Sensor | 1/2.9" Progressive Scan CMOS |
| Min. illumination | Color:0.01Lux@(F1.2,AGC ON) ;B/W:0Lux@(IR LED ON) |
| Day & Night | ICR |
| Shutter Speed | 1/5-1/20000 |
| Auto Iris | Fixed |
| Wide Dynamic Range | dWDR |
| Digital Noise Reduction | 2D/3D |
| Lens | 3.6mm,2.8/6mm Optional |
| FOV | 85° |
| IR LED | 2pcs |
| IR Range | Up to 20m |
| IMAGE | |
| Video Compression | H.264 High/Main/Baseline Profile, MJPEG |
| Bit Rate (CBR/VBR) | Main stream:500kb-12000kb ,Sub stream 100kb-6000kb |
| Audio Compression | G.711 ,RAW_PCM |
| Max. Resolution | 1920x1080/30fps |
| Stream | Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA |
| Image Setting | Rotate Mode ,Saturation, Brightness, Contrast, Sharpness |
| HLC | Yes |
| 9:16 Corridor mode | Yes |
| ROI | Yes |
| Defog | Yes |
| NETWORK | |
| Network Protocols: | IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast |
| Alarm Trigger | Motion Detection, Network disconnect, Disk alarm ,I/O alarm |
| RTSP Video | Standard RFC2326, Support QuickTime / VLC Player. |
| Security | User security authentication, Reset, Hardware Watch Dog |
| Web Language | English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand) |
| System Compatibility | Onvif |
| Interface | |
| Ethernet | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| Microphone | Yes, built-in |
| Audio I/O | Default 1ch Audio Out, Optional 1ch Audio In/Out |
| Alarm I/O | Optional 1ch Alarm In/Out |
| RS485 | N/A |
| BNC Output | N/A |
| Reset Button | Yes (build-in) |
| Edge Storage | N/A |
| GENERAL | |
| Power Supply | DC12V/POE |
| Power Consumption | 5W(IR LED OFF); 7W (IR LED ON) |
| Operating Temperature | Starting Temperature: -30°C ~ 60°C (-22°F ~ 140°F) Working Temperature: -40°C ~ 60°C (-40°F ~ 140°F) |
| Operating Humidity | 0% - 90% RH |
| Ingress Protection | IP67 |
| Approvals | CE / FCC |
| Product Dimensions | 119.09x89.1mm |
| Product Weight | 500g |