

# TC-NC24V

## 2MP Vandalproof Varifocal IR Dome Camera


# Tiandy



### Features

- Up To 1080P, 1920x1080@30fps
- H.264/M-JPEG Codec
- Min. Illumination Color: 0.5 Lux,B/W: 0.25Lux,0 Lux with IR
- Manual 2.8-12mm
- Smart IR, IR Range: 30m
- VCA Tripwire/Perimeter
- Interface Audio I/O:1/1,Alarm I/O:1/0,Micro SD card slot up to 128G,USB,Reset Button
- TVS 6000V, Lightning/Surge Protection: (Power 2000V, RJ45 1000V), IP66,IK10
- Operating Conditions -35℃ ~ 60℃ (IR OFF) /-35℃ ~ 40℃ (IR ON), 0 ~ 95% RHG
- CE, FCC, RoHS

### Dimensions

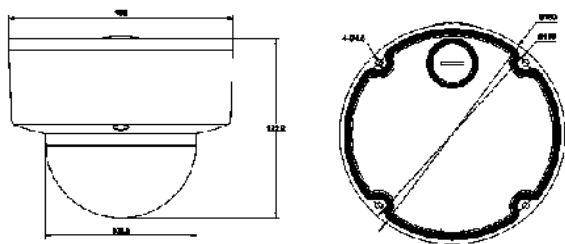

### Bracket(Optional) Model: A21+A24



Camera	
Image Sensor	1/2.8" CMOS
Core Processor	ARM9 Architecture
Operating System	Embedded Linux
Signal System	PAL/NTSC
Min. Illumination	Color: 0.5 Lux @(F1.2, AGC ON) B/W: 0.25Lux @(F1.2, AGC ON); 0 Lux with IR
Shutter Time	1s to 1/100,000s
Lens	2.8-12mm, Angle of View: 88.1°~31.2°
Lens Mount	φ14
Auto Iris	N/A
Adjustment Range	Pan:0° - 355°, Tilt: 0° - 75°, Rotation: 0° - 355°
Day& Night	IR Cut Filter with Auto Switch
Wide Dynamic Range	100 dB
Digital Noise Reductio	3D DNR
Focus	Manual
S/N Ratio	>60dB
Compression Standard	
Video Compression	H.264/MJPEG
Video Bit Rate	32Kbps~16Mbps
Audio Compression	G.711A/G.711U/ADPCM
Audio Bit Rate	G711 8KHz, 64kbps
Image	
Max. Image Resolutio	1920x1080
Frame Rate	50Hz 25fps (1920 × 1080), 25fps (1280 × 720) 60Hz 30fps (1920 × 1080), 30fps (1280 × 720)
Triple Stream	Mainstream:1080P(1920*1080) Substream:D1(704*576) 3rd stream:CIF(352*288)
Image Settings	Brightness, Saturation, Contrast,Flip Mode
HLC	Y
Smart Defog	Y
Corridor Format	Y, Available for 720P and Above
EIS	Y
ROI	4 Zones
Privacy Mask	4 Zones
Picture Overlay	200 × 200, BMP 24bit, Zone Configurable
OSD	16×16, 32×32, 24×24, 48×48, 64×64, 96×96 Size Letters Such as Week,
Network	
Browser	IE8/Firefox24 or above
Network Storage	FTP
NTP	Y
ANR	Y
Video Analytics	Tripwire/Perimeter
Alarm Trigger	Motion Detection/IP Conflict/MAC Conflict/Port Alarm/Mask Alarm
Protocols	IPv4/IPv6/HTTP/802.1x/FTP/SMTP/UPnP/SNMP DNS/DDNS/NTP/RTSP/TCP/UDP/DHCP/PPPoE HTTPS/ARP/RTP/QoS/BONJOUR/MULTICAST/ICMP/IGMP
Remote Connection	3 Users Access at the Same Time
NTP	Y
System Compatibility	ONVIF (Profile S), SDK
Interface	
Audio Input	1-ch
Audio Output	1-ch
Communication Interf	1-ch RJ45 10M/ 100M Ethernet Interface
Alarm Input	1-ch
Alarm Output	N/A
Video Output	N/A
On-board Storage	MicroSD Card Slot, up to 128GB
Extension	1x USB
General	
Language	English,Spanish,Korean,Italian,Turkish,Thai,Russian Polish,French,Traditional Chinese,Simplified Chinese
Power Supply	DC 12V±10%/AC24V±10%/PoE
Power Consumption	Max. 5W(IR OFF) (ICR Instant Switch 11W) Max. 8W(IR ON)
Circuit Protection	TVS6000V, Lightning/Surge Protection: (Power 2000V, RJ45 1000V)
Impact Protection	IP66, IK10
IR Range	30m
IR LEDs	32pcs
Dimensions	150mm×150mm×122mm
Weight	1.0KG (IP Camera Only); 1.3KG (with Packing Box)
S+265:	Tiandy enhanced H.265 codec
ANR:	Auto store video in SD card when NVR disconnected, and upload video to NVR when resumed connection(Only Support Tiandy ANR NVR)

\* The latest product information / specification can be found at <http://en.tiandy.com/>

CE FC RoHS

Tiandy Digital Technology Co., Ltd. | [en.tiandy.com](http://en.tiandy.com)

Address: No.8, Huake Rd2, Binhai Hi-Tech Industry(Huayuan), Tianjin 300384 China

Tel: +86-22-58596037 Email: [sales@tiandy.com](mailto:sales@tiandy.com)

