

4K H.265 5CH 1HDD NVR

Model TC-NR5005M7-S1


Tiandy



Features

- 5ch 4K/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF IP Camera Input
- 1ch 4K/6MP/5MP/4MP/2-ch 3MP/4-ch 1080P/5-ch 720P/4CIF Realtime Display
- 5-ch Sub-stream 4CIF Realtime Display
- 1-ch 4K/4-ch 1080P/720P/4CIF Sync Playback
- Up to 4K Resolution Recording
- Bandwidth in/out 40Mbps/40Mbps
- HDD Quota and Group Management
- Dual Gigabit Network Interfaces
- Support 5-ch Intelligent Analysis Process
- Smart Search&Recording, Plug&Play
- Support ANR Function
- Support N+m Hot Standby Function
- 1x HDMI, 1x VGA, Same Video Source, Max Resolution 4K
- 1 SATA(Up to 4TB), Alarm I/O 0/1, 2xUSB
- CE, FCC, RoHS

Dimensions

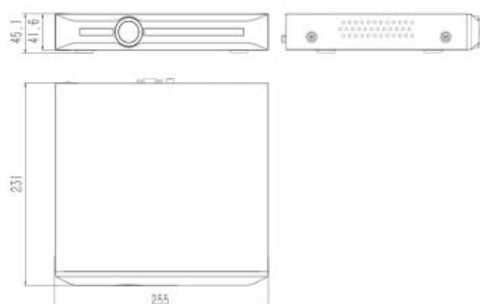

Specification	
Video/Audio Input	
IP Video Input	5ch
Audio Input	N/A
Network	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	40Mbps
Remote Connection	16 Users, Up to 48ch Videos
Browser	IE8, IE9, IE10, IE11, Firefox24
Mobile Software	P2P&DDNS for IOS&Android (Tiandy: EasyLive, Neutral: MobileLive)
Internet Protocol	TCP/UDP/HTTP/MULTICAST/UPnP/DHCP/PPPoE/DDNS/NFS/FTP/NTP/HTTPS/
Email	Activated by Alarm
ANR	Y, Auto download video from camera SD card, Which was stored when
Advanced	Remaining Bandwidth Display
Video/Audio Output	
HDMI Output	1-ch Resolution: 3840×2160, 2560×1600, 2560×1440, 1920×1080, 1280×720,
VGA Output	1-ch Resolution: 1920×1080, 1280×720, 800×600, 1024×768,
Frame Rate	Mainstream 25fps(P)/30fps(N) Substream
I-Frame Record	Y
Recording Resolution	4K(3840*2160, 3264*2448, 3296*2472)/6MP(2752*2208, 3008*2008, 2408*2008)/5
Audio Output	N/A
Synchronous Playback	1-ch 4K/6MP/5MP/4MP/2-ch 3MP/4-ch 1080P/720P/4CIF Synchronous Playback
Decoding	
Live View/Playback	4K(3840*2160, 3264*2448, 3296*2472)/6MP(2752*2208, 3008*2008, 2408*2008)/5
Capability	1-ch 4K/6MP/5MP/4MP/2-ch 3MP/4-ch 1080P/5-ch 720P/4CIF
Display Split	1/4/6
E-Zoom	Y
Hard Disk	
SATA	1 SATA for 1HDD
E-SATA	N/A
Capacity	Up to 4TB
NTFS Files System	Y
HDD Management	Group and Quota, Customized Recording Days
External Interface	
Network Interface	1X RJ-45 10/100Mbps Self-adaptive Ethernet Interfaces
Serial Interface	N/A
USB Interface	1x USB3.0, 1x USB2.0
Alarm In/Out	0/1
Advance	
NAS	NFS Protocol, Support Manual Backup Only
Plug and Play	Y, Only for Tiandy Cameras
Image Flip	Y, Only for Tiandy Cameras
Hot Standby	N+M
Corridor Mode	Y, 16:9 to 9:16, Only for Tiandy Cameras
Video Analytics(VCA)	Support 5-ch Camera VCA Function, Including Tripwire/Double
Smart Search	Quickly Search Target Videos according to Channel No., Records Type, Records
Trigger Recording	Manual/Timing/Motion Detection/Port Alarm/ VCA Alarm/Video Occlusion
Smart Recording	Set Recording Bite Rate for Different Time
Alarm Recording	Pre Alarm Default 10s (5/10/15/60s Optional) , Post Alarm Default 10s
One Key Control	Intercom, Recording
Records Format	SDV, Export MP4 in H.264 Format
Records Encryption	Y
Records Tag	Y
Onvif	Onvif(Profile S)
General	
Language	English, Spanish, Korean, Italian, Turkish, Thai, Russian, Traditional
Power Supply	DC12V 2A
Consumption(without	≤ 10W
Working Temperature	-10 °C ~ +55 °C (+14 °F ~ + 131 °F)
Working Humidity	10 % ~ 90 %
Chassis	1U
Dimensions	44mm×255mm×231mm
Weight	0.8KG (without HDD), 1.4KG (with Packing Box)

* The latest product information / specification can be found at <http://en.tiandy.com/>

CE FC RoHS

Tiandy Digital Technology Co., Ltd. | en.tiandy.com

Add: No.8, Huake Rd2, Binhai Hi-Tech Industry(Huayuan), Tianjin 300384 China

Tel: +86-22-58596037 Email: sales@tiandy.com

