

# DynaHawk™ Z6 Series

Multiple Streams Ultra High Definition Box IP Camera




network DynaHawk Z6 series Multiple Streams Ultra High Definition Box IP Cameras utilize SONY high class CMOS sensor, Z6 offers up to 4k2k resolution in real-time frame rate, that provides extraordinarily detailed image without losing any movement.

With state-of-the-art encoder SOC, Z6 is capable of streaming out 8MP resolution real-time or 6MP resolution real-time with 720P real-time sub stream. While multiple Region of Interest (ROI), 3D Noise Reduction are also supported with Ultra HD streaming for different application scenarios, Z6 only requires reasonable consumption power that saves the expense for users.

Besides flexible software features, Z6 is built-in with Auto Back Focus (ABF) function. User can simply adjust focus by clicking control buttons on webpage that makes focus adjustment easier under 8MP resolution and also makes remote focus tuning available after installation.

## ■ Key Features

- 8MP / 6MP Progressive Scan CMOS Sensor
- Ultra HD 4k2k @ 30fps or 6MP @ 30fps + 720P @ 30fps
- Specific ARM for Analytics Hardware Acceleration
- Quad Streams Compression- H.264 Baseline / Main / High Profile + MJPEG
- Multiple and Dynamic ROI Windows
- Auto Back Focus (ABF)
- 3D Motion Compensated Noise Reduction (MCTF)
- Text Overlay and Privacy Masks
- microSD Support
- BNC analog output
- Triple Power Support- PoE / DC12V / AC24V
- ONVIF Profile S Conformance

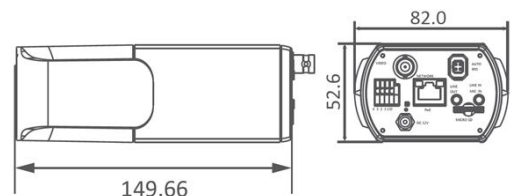

Unit: (mm)

# DynaHawk™ Z6 Series - Ultra High Definition Box IP Camera

Camera		Z4SF-6	Z4SA-6
Image Sensor		1/1.7" Sony Progressive CMOS	1/1.8" Sony Progressive CMOS
Effective Pixels		12M	6M
Minimum Illumination		0.05 lux @F1.8 (Color) 0.005 lux @F1.8 (B/W)	0.04 lux @F1.8 (Color) 0.002 lux @F1.8 (B/W)
Shutter Speed		1 - 1/10000 sec.	
Operation			
Multiple Languages		English / French / German / Italian / Japanese / Korean / Portuguese / Russian / Simplified Chinese / Spanish / Traditional Chinese	
Image Setting	Backlight Compensation	On / Off (w/ Motion Compensation)	
	White Balance	Manual / AWB / ATW	
	3D Noise Reduction	On / Off	
	Wide Dynamic Range	On / Off	
	Privacy Mask	On / Off	
	Brightness	Manual	
	Exposure	Auto / Manual	
	Sharpness	Manual	
	Contrast	Manual	
	Saturation	Manual	
	Hue	Manual	
	Digital Zoom	Support	
	Motion Detection	On / Off / By Schedule	
	Privacy Mask Type	Color	
	ICR	Auto / LED On / LED Off / Smart IR / Light Sensor	
Audio	Two-way Audio	Line in / Line Out	
	Compression	G.711/G.726	
Auto Back Focus		Support	
Network			
Interface		RJ-45, 1Gbps Ethernet	
Video Compression		MJPEG / H.264 (MPEG-4 Part 10/AVC) Baseline / Main Profile / High Profile	
Video Streaming	Single	H.264 4K2K (3840x2160) @25/30fps	H.264 6M (3072x2048) @25/30 fps
	Dual	H.264 4K2K (3840x2160) @20fps + H.264 1080P @20fps or H.264 1080P @50/60 fps + H.264 1080P @25/30 fps Note: 1 of the 2M or under streamings can be MJPEG	H.264 6M (3072x2048) @25/30 fps + 720P @25/30fps or H.264 1080P @50/60 fps + H.264 1080P @25/30 fps Note: 1 of the 2M or under streamings can be MJPEG
	Quad	H.264 1080P @50/60 fps + H.264 SXGA @25/30 fps + H.264 720P @25/30 fps + H.264 D1 @25/30 fps Note: 1 of the 2M or under streamings can be MJPEG	
Video Resolution	H.264	4K2K (3840 x 2160) / Full HD 1080P / SXGA / 720P / XGA / SVGA / D1 / VGA / CIF / QVGA	6M (3072 x 2048) / Full HD 1080P / SXGA / HD 720P / XGA / SVGA / D1 / VGA / CIF / QVGA
	MJPEG	Full HD 1080P / SXGA / 720P / XGA / SVGA / D1 / VGA / CIF / QVGA	
Video Windows under ePTZ		4	
Video Analytic Engine		Edge Embedded (Camera Side)	
Protocol		ARP, IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ONVIF	
Security		HTTPS / IP Filter / IEEE 802.1X	
Alarm	Input	1 Set 5V 10kΩ pull up	
	Output	1 Set Photo Relay Output 300V DC/AC	
Event Notification		HTTP / FTP / SMTP	
Micro SD		microSDXC 64GB support	
Supported Web Browser		Internet Explorer (6.0+) / Chrome / Firefox / Safari	
User Account		20	
Password Levels		User and Administrator	
Mechanical			
Lens Mounting		CS Mount	
LED Indicator		Power / Link / ACT	
Connectors	Auto Iris	DC Drive	
	Alarm	4 Pin Terminal Block, Pitch 3.5 mm	
	Power	DC jack or 2pin Terminal Block	
	Ethernet	RJ-45	
	Analog Video	1.0 Vp-p / 75 Ω, BNC	
Audio		Line in / Line Out	
General			
Operating Temperature		-10°C - 50°C (14° - 122° F)	
Humidity		10% - 90%, No Condensation	
Dimension		149.66 x 79.73 x 52.57 mm (L x W x H) w/o Lens	
Weight		395g (0.87 lb) w/o lens	
Power Source		DC 12V / AC 24V / PoE	
Power Consumption		max 8.5W	
Regulatory		CE / FCC	

Product specification and availability are subject to change without notice.



**DYNACOLOR, INC.**

No. 116, Jou Tz Street, Neihu, Taipei 114, Taiwan

TEL: (886)2-2659-8898

FAX: (886)2-2659-8868

http://www.dynacolor.com.tw

info@dynacolor.com.tw