

# NVR304-32EP

STAR SERİSİ

## 32 Kanal PoE H.265 & 4K NVR




ONVIF




### Özellikleri

- \* 32 Kanala kadar 4K IP kamera desteği, Onvif desteği
- \* Koridor modu özelliği, 320 mbps bant genişliği
- \* P2P barkod okuma özelliği
- \* 4 adet SATA (32 TB Kadar) HDD Desteği
- \* 2 adet HDMI, 1 adet VGA çıkışı
- \* H.265 Codec sıkıştırma Formatı
- \* 16 alarm girişi, 4 alarm çıkışı 16 PoE Çıkışı
- \* Akıllı Telefon Desteği ( Apple & Android )

### Sistem Bağlantıları

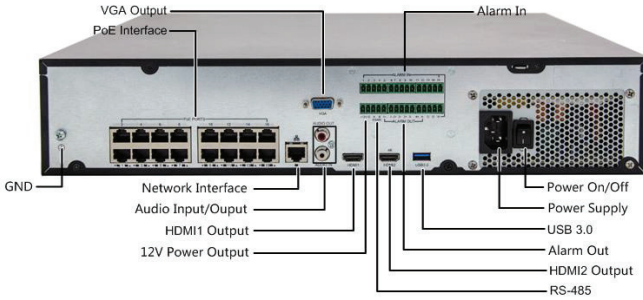

### Boyutları

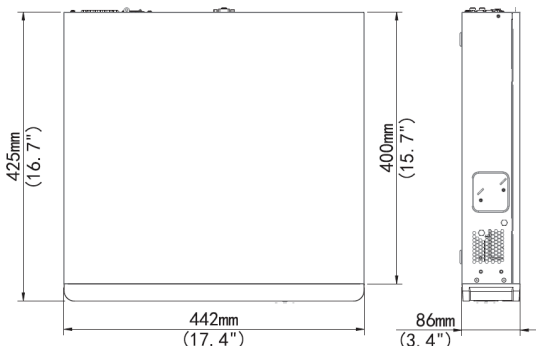

### Teknik Özellikleri

Model	NVR304-32EP
<b>Video and Audio</b>	
IP Video Input	32 Kanal
Two-way audio Input	1-ch, RCA
<b>Network</b>	
Incoming bandwidth	320Mbps
Outgoing bandwidth	320Mbps
Remote connection	128
<b>Video/Audio Output</b>	
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Corridor Mode	Destekler
CVBS Output	N/A
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
<b>Decoding</b>	
Compression	Ultra 265, H.265, H.264
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080p@30, 32 x 960p@25
<b>Hard Disk</b>	
SATA	4 SATA interfaces
Capacity	up to 8TB for each HDD
<b>Smart</b>	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
<b>External Interface</b>	
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces
Serial Interface	1 x RS485
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0
Alarm In	16-ch
Alarm Out	4-ch
Decoding Card (optional)	N/A
Power Output	12 VDC
<b>PoE</b>	
Interface	16 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port, Max 200W in total ( 12.5W for each )
Supported Standard	IEEE 802.3at
<b>General</b>	
Power Supply	100 ~ 240 VAC
Consumption ( without HDD and PoE )	≤ 20 W
Working Environment	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	442 mm× 425mm×86mm (17.4" × 16.7"×3.4" )
Weight ( without HDD )	≤ 5.24 Kg ( 11.55 lb )

IP KAMERALAR

PTZ IP KAMERA

NVR

MOBİL

AHD KAMERA

AHD DVR

TRAFİK

AKSESUARLAR

YAZILIMLAR