

# NVR304-16/32E Kanal

STAR SERİSİ

## 16/32E Kanal Star Serisi H.265 & 4K NVR




ONVIF




### Özellikleri

- \* 16/32 Kanala kadar 4K IP kamera desteği, Onvif desteği
- \* Koridor modu özelliği
- \* P2P barkod okuma özelliği
- \* 4 adet SATA Girişi (32 TB Kadar) HDD Desteği
- \* 2 adet HDMI, 1 adet VGA çıkışı
- \* Ultra 265, H.265 Codec sıkıştırma Formatı
- \* 16 alarm girişi, 4 alarm çıkışı
- \* Akıllı Telefon Desteği ( Apple & Android )

### Sistem Bağlantıları

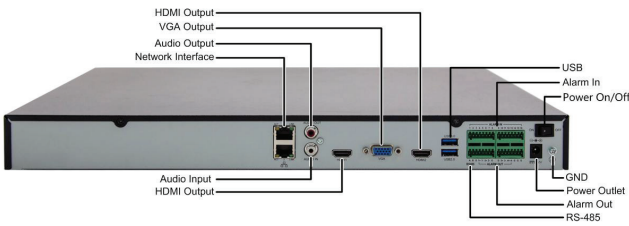

### Boyutları

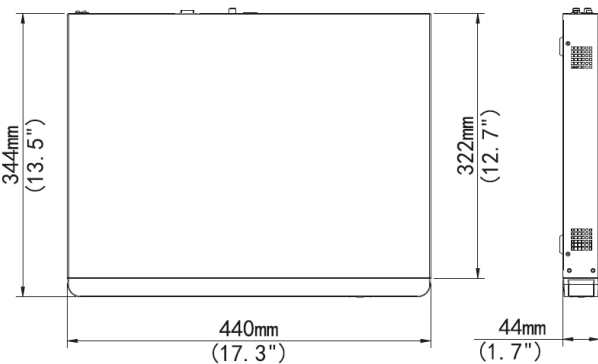

### Teknik Özellikleri

Model	NVR304-16E	NVR304-32E
<b>Video and Audio</b>		
IP Video Input	16 Kanal	32 Kanal
Two-way audio Input	1-ch, RCA	
<b>Network</b>		
Incoming bandwidth	160Mbps	320Mbps
Outgoing bandwidth	320Mbps	
Remote connection	128	
<b>Video/Audio Output</b>		
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
Corridor Mode	Destekler	
CVBS Output	N/A	
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	16-ch	
<b>Decoding</b>		
Compression	Ultra 265, H.265, H.264	
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080p@30, 32 x 960p@25	
<b>Hard Disk</b>		
SATA	4 SATA interfaces	
Capacity	up to 8TB for each disk	
<b>Smart</b>		
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking	
VCA Search	Face search, Behavior search	
Statistical Analysis	People counting	
<b>External Interface</b>		
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces	
Serial Interface	1 x RS-485	
USB Interface	Front panel: 1 x USB2.0 Rear panel: 1 x USB2.0, 1 x USB3.0	
Alarm In	16-ch	
Alarm Out	4-ch	
Power Output	12V DC	
<b>PoE</b>		
Interface	16 independent 100 Mbps PoE network interfaces	
Max Power	Max 30W for single port, Max 200W in total ( 12.5W for each )	
Supported Standard	IEEE 802.3at	
<b>General</b>		
Power Supply	100 ~ 240 VAC	
Power Consumption	≤ 20 W( without HDD )	
Working Environment	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)	
Dimensions(WxDxH)	442 mm× 425mm×86mm (17.4" × 16.7"×3.4" )	
Weight ( without HDD )	≤ 5.24 Kg ( 11.55 lb )	

IP KAMERALAR

PTZ IP KAMERA

NVR

MOBİL

AHD KAMERA

AHD DVR

TRAFİK

AKSESUARLAR

YAZILIMLAR