

LNX-0802C-SFP Series

8-Port Industrial Gigabit Unmanaged Ethernet Switch, 6*10/100Tx, 2*Gigabit Combo Ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots)



Features


- ▶ Supports 6-Port 10/100Tx and 2*Gigabit Combo Ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots)
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 8K MAC Address Table
- ▶ Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range - STD: -10° to 70° C, EOT: -40° to 75° C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNX-0802C-SFP series industrial Gigabit unmanaged Ethernet switch series is IP30 rated and DIN-Rail mountable with 6*10/100Tx + 2*GigE combo ports (2*10/100/1000Tx RJ45, and 2*100/100 SFP slots for fiber), making it ideal for applications that demand high bandwidth and long-distance communication.

This series provides a high EFT and ESD protection and dual power input with a reverse power polarity protection. In addition, the built-in relay warning function alerts maintainers when power failures occur. There is a wide operating temperature model that supports from -40 to 75°C. It is a perfectly designed product to fulfill special needs for industrial automation, outdoor and harsh weather environment applications.

DIMENSIONS

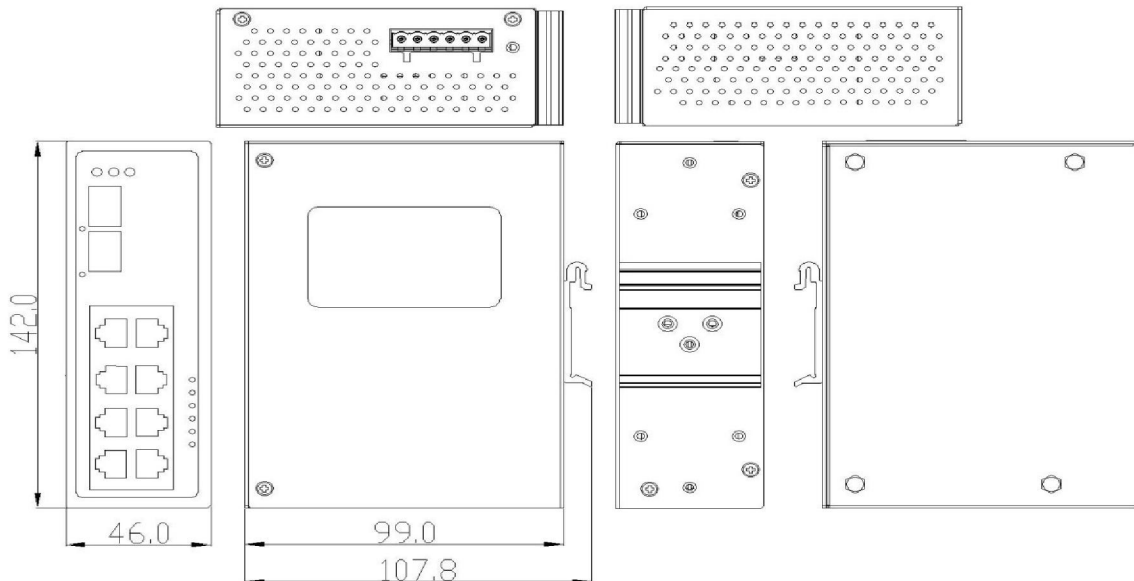

SPECIFICATIONS

| Technology | | Mechanical Characteristics | |
|--|--|----------------------------------|--|
| Standards | IEEE 802.3 10BaseTx Ethernet | Housing | Metal, IP30 protection |
| | IEEE 802.3u 100BaseTx Fast Ethernet | Dimensions | 46 x 99 x 142 mm (W*D*H) |
| | IEEE 802.3ab 1000BaseTx | Weight | Unit: 1.5 lbs. |
| | IEEE 802.3z Gigabit Fiber | | Shipping Weight: 2.0 lbs. |
| Processing Type | Store and Forward | Mounting | DIN-Rail, Wall mounting (optional) |
| Protocol | CSMA/CD | Environmental Limits | |
| Flow Control | IEEE 802.3x back pressure flow control | Operating Temperature | STD: -10° to 70°C EOT: -40° to 75°C |
| Switch Properties | | Storage Temperature | -40°C ~ 85°C |
| Transfer Rate | 14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port | Ambient Relative Humidity | 5 to 95%, (non-condensing) |
| Jumbo Frame | - | Regulatory Approvals | |
| MAC Table Size | 8K | EMI | FCC Class A |
| Interface | | EMS | EN61000-4-2,3,4,5,6,8 EN61000-6-2,4 |
| Ethernet Port | 6*RJ45 Ports w/10/100Tx | Free Fall | IEC60068-2-32 |
| Gigabit Combo Port (Copper/SFP) | 2 *RJ45 Ports w/10/100/1000TX Ethernet and 2*100/1000 SFP Slot | Shock | IEC60068-2-27 |
| Network Cable | 10Base Tx: 2-pair UTP/STP Cat. 3,4,5 100Base Tx: 2-pair UTP/STP Cat. 5 1000Base Tx: 2-pair UTP/STP Cat. 5/5E | Vibration | IEC60068-2-6 |
| | | Green | RoHS Compliant |
| | | Certifications | FCC, CE, UL 61010-1, UL 61010-2-201, UL Class 1 Division 2, ISA 12.12.01 |
| Power Requirements | | Warranty | 5 Years |
| Input Voltage | 12~48VDC, Redundant Input | | |
| Overload Current Protection | Present | | |
| Connection | 1 removable 6-contact terminal block | | |
| Reverse Polarity Protection | Yes | | |
| Power Consumption | 10 Watts | | |

ORDERING INFO

| LNX-0802C-SFP | 8-Port Industrial Gigabit Unmanaged Ethernet Switch, w/6*10/100Tx, and 2*Gigabit Combo ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots) |
|------------------------|---|
| LNX-0802C-SFP-T | 8-Port Industrial Gigabit Unmanaged Ethernet Switch, w/6*10/100Tx, and 2*Gigabit Combo ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots) ; EOT: -40° to 75°C |
| Optional Accessories | |
| DR-15-24 | 15W Industrial Din Rail Power Supply, 24VDC |
| DR-45-24 | 45W Industrial Din Rail Power Supply, 24VDC |
| MDR-60-48 | 60W Industrial Din Rail Power Supply, 48VDC |
| DR-75-48 | 75W Industrial Din Rail Power Supply, 48VDC |