

DH-S1000-8TP

8-Port 100Mbps POE Switch



Features


- 1*1000Mbps SFP optical port , 1*1000Mbps RJ45 port and 8*100Mbps RJ45 ports
- Switch capacity 5.6Gbps, forwarding rate 8.3 Mbps
- IEEE802.3af, IEEE802.3at standards
- High performance lookup engine with support for up to 8K MAC address entries with automatic
- Port self-adaptive MDI/MDIX modes
- Indicator displays Link/Act status
- Metal plate, brand new design
- AC 220 power supply

DH-S1000-8TP

Specifications


| | |
|------------------------|---|
| Model | DH-S1000-8TP |
| Physical Port | |
| Network Port | 8*10/100 Base-T; 1*10/100/1000 Base-T; 1*1000 Base-X |
| Technical Index | |
| Switch Capacity | 5.6Gbps |
| Forwarding Rate | 8.3Mpps |
| Switch Mode | Storage forwarding |
| MAC Study | MAC auto study, address list capacity is 8K |
| POE Standard | IEEE802.3af、 IEEE802.3at |
| Output Power Per Port | RJ 45 port1,2 support 60W IEEE802.3af, IEEE802.3at RJ45 port 3,4 support IEEE802.3 af ,IEEE802.3at RJ45 port 5,6,7,8 support IEEE802.3 af |
| Other | |
| Power | AC 100~240V |
| Power Consumption | ≤190W |
| Temperature | -10°C ~55°C |
| Humidity | 10%~90% RH |
| Dimensions(W x D x H) | 300mm×220mm×44.4mm |
| Installation | Rack-mounted |

Dimensions (mm)

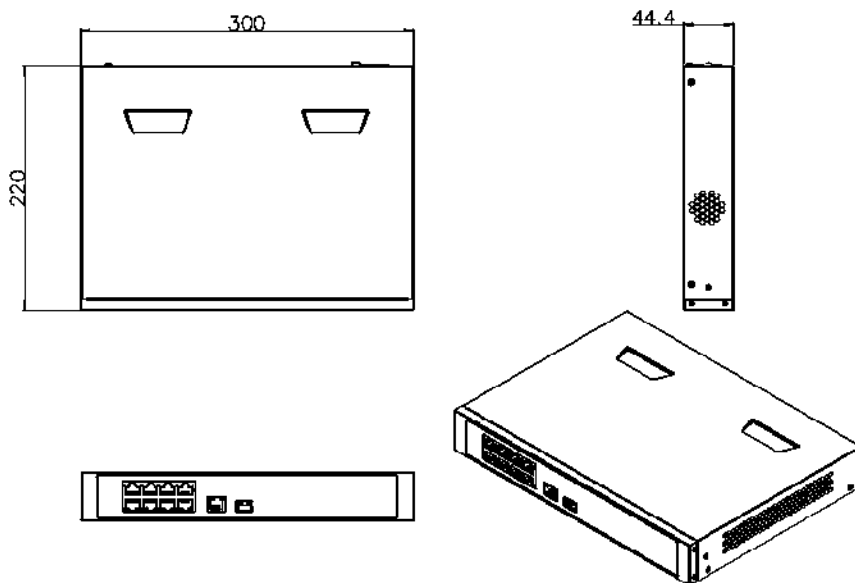

DH-S1000-8TP

Application

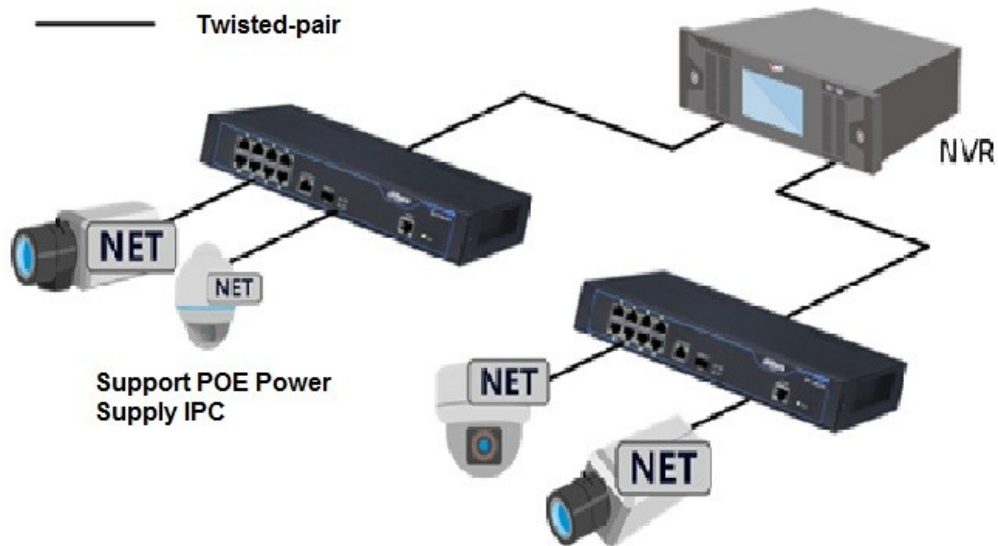

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.