

DS-9000HUHI-F16/N SERIES TURBO HD DVR

Features and Functions

Video Input and Transmission

- Connectable to HDTV, AHD, HDCVI and analog cameras
- Up to 18/32-ch 8 MP IP cameras input for DS-9008/9016HUHI-F16
- Long distance transmission over UTP and coaxial cable

Compression and Recording

- One-key enable H.264+ compression improves encoding efficiency by up to 50% and reduces data storage costs
- Full channel recording at up to 3 MP resolution
- Supports POS triggered recording and POS information overlay

Video Output

- Simultaneous HDMI1 and VGA output at up to 1920 × 1080 resolution, and independent HDMI 2 output at up to 4K (3840 × 2160) resolution
- Independent CVBS output improves compatibility at the most possibility and serves as the aux output or live view output only

Storage and Playback

- 16 SATA interfaces (up to 8 TB capacity per HDD) and 2 eSATA interfaces
- Hot-swappable HDD supporting RAID 0, RAID 1, RAID 5, RAID 6 and RAID 10 storage scheme
- 8/16-ch synchronous playback
- Smart search for efficient playback
- Supports playback by main stream, or sub-stream for IP cameras
- Supports the 3rd party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports line crossing detection and intrusion detection of all channels
- Supports people counting and heat map functions for 1-ch analog camera
- VQD (Video Quality Diagnostics)
- Unlock pattern for device login for the admin and clear-text password available
- GUID file can be exported for password resetting and imported for finding the forgotten password
- Supports PTZ control via Omnicast VMS of Genetec protocol

Network & Ethernet Access


- Hik Cloud P2P & HiDDNS (Dynamic Domain Name System) for easy network management
- Two gigabit Ethernet network interfaces
- Output bandwidth limit configurable



Specifications

Model		DS-9008HUHI-F16/N	DS-9016HUHI-F16/N	
Video/Audio input	Video compression	H.264+/H.264		
	Analog video input	8-ch	16-ch	
		BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
	HDTVI input	3 MP, 1080p25, 1080p30, 720p25, 720p30, 720p50, 720p60		
	AHD input	720p25, 720p30, 1080p25, 1080p30		
	HDCVI input	720p25, 720p30, 1080p25, 1080p30		
	CVBS input	Support		
	IP video input	10-ch (Up to 18-ch)	18-ch (Up to 32-ch)	
		Up to 8 MP resolution H.265/H.264+/H.264		
	Audio compression	G.711u		
Audio input	8-ch	16-ch		
	BNC (2.0 Vp-p, 1 KΩ)			
Video/Audio output	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
	HDMI1/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	HDMI2 output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	Encoding resolution	3 MP/1080p/720p/WD1/4CIF/VGA/CIF		
	Frame rate	Main stream: 3 MP@15fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)		
		Sub-stream: WD1/4CIF@12fps; CIF/QVGA/QCIF@25fps (P)/30fps (N)		
	Video bit rate	32 Kbps to 10 Mbps		
	Audio output	2-ch, BNC (Linear, 1 KΩ)		
	Audio bit rate	64 Kbps		
	Dual stream	Support		
	Stream type	Video, Video & Audio		
Synchronous playback	8-ch	16-ch		
Network management	Remote connections	128		
	Network protocols	TCP/IP, PPPoE, DHCP, Hik Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, SNMP		
Hard disk	SATA	16 SATA interfaces		
	eSATA	Support		
	Capacity	Up to 8 TB capacity for each disk		
Disk array	Array type	RAID 0, RAID 1, RAID 5, RAID 6, RAID 10		
External interface	Two-way audio input	1-ch, BNC (2.0 Vp-p, 1 KΩ) (independent)		
	Network interface	2, RJ45 10M/100M/1000M self-adaptive Ethernet interface		
	USB interface	Front panel: 2 × USB 2.0		
		Rear panel: 2 × USB 3.0		
	Serial interface	RS-232, RS-485 (full-duplex), Keyboard		
General	Alarm in/out	16/8		
	Power supply	100 to 240 VAC		
	Consumption (without HDD)	≤ 230 W		
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)		
	Working humidity	10% to 90%		
	Dimensions (W × D × H)	442 × 493 × 146 mm (17.4 × 19.4 × 5.7 inch)		
	Weight (without HDD)	≤ 15 kg (33.1lb)		

Physical Interfaces

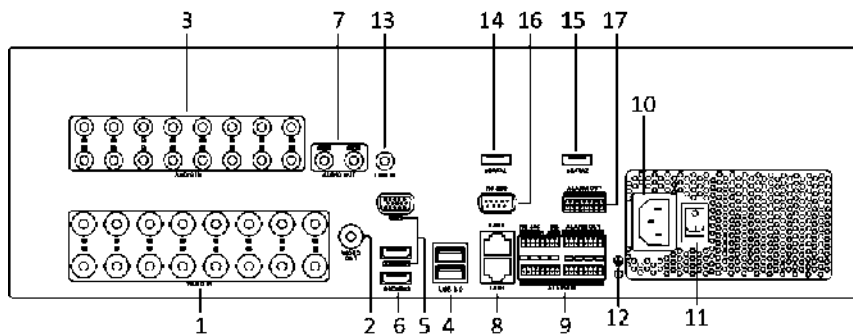

NOTE

The rear panel of DS-9008HUHI-F16/N provides 8 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	10	100 to 240 VAC Power Input
2	VIDEO OUT	11	Power Switch
3	AUDIO IN, BNC	12	GND
4	USB Interface	13	LINE IN
5	HDMI1/VGA Interface	14	eSATA1 Interface
6	HDMI2 Interface	15	eSATA2 Interface
7	CVBS AUDIO OUT and VGA AUDIO OUT	16	RS-232 Serial Interface
8	LAN1 and LAN2 Network Interfaces	17	ALARM OUT
9	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT		

Distributed by

Available Models

DS-9008HUHI-F16/N, DS-9016HUHI-F16/N

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com