

# SN-IPR56/41ACDN


# 4MP Network IR Mini Eyeball



## Key features

- 1/3" Progressive Scan CMOS
- 2.8mm,3.6/6mm optional
- 4MP@15fps,3MP@20fps,1080P@30fps
- Triple Streams
- Smart IR Range Up to 20m
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- ROI,Defog,HLC,Corridormode,DIS

## Dimension

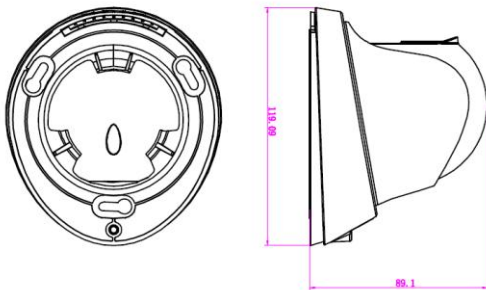

## Accessories



SN-CBK633

## Specifications

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color:0.05Lux@(F1.2,AGC ON) ; B/W:0Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	2.8mm,3.6/6mm optional
FOV	90°
IR LED	2pcs
IR Range	Up to 20m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ,Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	2688*1512/2560*1440/15fps,2304*1296/20fps,1920x1080/30fps
Stream	Stream1 2688*1512/2560*1440/2304*1296/1920x1080 Stream 2 720p to QVGA
Image Setting	Rotate Mode, Saturation Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Auto
Defog	Yes
NETWORK	
Network Protocols:	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP,RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Motion Detection, Network disconnect, Disk alarm, I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand)
System Compatibility	Onvif
Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Microphone	Yes, Built-in
Audio I/O	1ch Audio In, 1ch Audio Out
Alarm I/O	1ch Alarm in, 1ch Alarm out
RS485	N/A
BNC Output	N/A
Reset Button	Yes (build-in)
Edge Storage	N/A
GENERAL	
Power Supply	DC12V/POE
Power Consumption	5W(IR LED OFF); 7W (IR LED ON)
Operating Temperature	Starting Temperature: -30 °C ~ 60 °C (-22 °F ~ 140 °F) Working Temperature: -40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP67
Approvals	CE / FCC
Product Dimensions	119.09x89.1mm
Product Weight	500g